

# WHG711

## WIRELESS LAN CONTROLLER




### INTRODUCTION

The 4ipnet WHG711 is an enterprise-grade wireless LAN controller that provides establishments such as hotels, universities, or even complete municipalities with a comprehensive set of managed Wi-Fi features at a competitive license-free price point. With AP management, user authentication, policy assignment, traffic shaping, firewall features, and much more all packaged into a single box, the WHG711 provides network administrators with a reliable, easy-to-use, and centralized management console for an entire organization's wireless network infrastructure.

The WHG711 is capable of managing up to 500 EAP/OWL-series Wireless Access Points and can be directly integrated with 4ipnet's SW-series Unified Access Switches, all of which can be deployed and configured easily by anyone, including non-wireless savvy users. For example, automated AP discovery prevents network administrators from having to go through the hassle of individually adding and configuring each access point. Access points as well as connected Wi-Fi devices can then be monitored and managed from a centralized point, with extensive logging & reporting features to assist in troubleshooting and maintenance.

As Wi-Fi enabled handheld devices such as smartphones and tablets become ever so prevalent in our daily lives, businesses and network operators alike are faced with a mind-boggling dilemma – how to simultaneously address the needs of BYOD (Bring Your Own Device), manage Wi-Fi users, and maintain network service quality for mission critical applications. 4ipnet's WHG711 is designed exactly with these requirements in mind, and with a total cost of ownership that satisfies even the most price conscious, organizations are guaranteed to receive an unmatched ROI on their wireless LAN infrastructure.

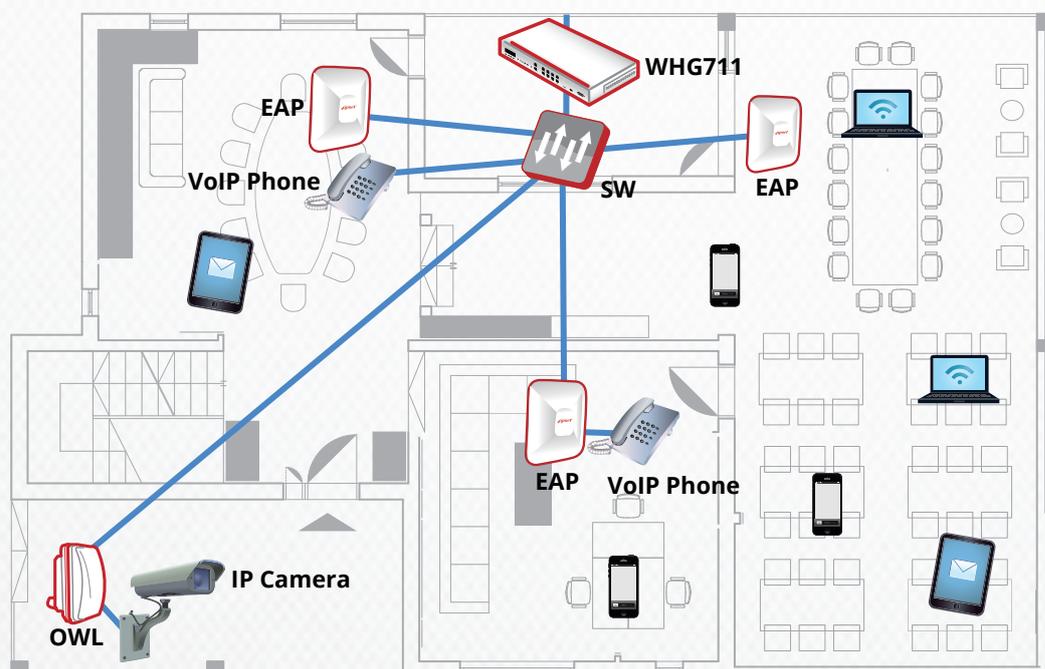

### FEATURES

#### SECURITY

Security is often one of the most important concerns when it comes to enterprise wireless networks. From the most basic need of preventing network access by unauthorized users to performing rogue AP detection and enforcing network isolation, 4ipnet WHG controllers provide a complex set of features that prevent malicious activities in an organization's network.

For deployment flexibility, the WHG controllers support user authentication via both the industry standard 802.1X as well as web-based captive portals. The highly customizable captive portals with integrated walled garden capability can be adapted to suit the needs of hotels, schools, and other public venues. For unregistered users without an account, guest access can be provided by simply entering an e-mail address.

The WHG controllers also support remote access via VPN, which is crucial for travelling businessmen. At the same time, site-to-site VPN establishes secure connections between corporate headquarters and branch offices.

| USER SECURITY               |   |
|-----------------------------|---|
| Authentication Types        | <ul style="list-style-type: none"> <li>♦ 802.1X</li> <li>♦ UAM (browser-based)</li> <li>♦ IP or MAC-based</li> </ul>  |
| Authentication Servers      | <ul style="list-style-type: none"> <li>♦ Local</li> <li>♦ On-Demand</li> <li>♦ Guest</li> <li>♦ RADIUS</li> <li>♦ LDAP</li> <li>♦ NT Domain</li> <li>♦ SIP</li> <li>♦ POP3</li> </ul> |
| Customizable Captive Portal | ♦ Yes   |
| Customizable Walled Garden  | ♦ Yes   |
| Integrated Guest Access     | ♦ Yes   |
| Local Account Database      | ♦ Yes   |
| User Blacklisting           | ♦ Yes   |
| NETWORK SECURITY            |   |
| VPN                         | <ul style="list-style-type: none"> <li>♦ Remote Access</li> <li>♦ Local Access</li> <li>♦ Site-to-Site</li> </ul>   |
| Tunneling Protocols         | <ul style="list-style-type: none"> <li>♦ IPSec</li> <li>♦ PPTP</li> </ul>   |
| Network Isolation           | <ul style="list-style-type: none"> <li>♦ Intra-VLAN or Port</li> <li>♦ Inter-VLAN or Port</li> </ul>  |
| Rogue AP Detection          | ♦ Yes   |
| Certificates                | ♦ Built-in Root CA  |

#### MOBILITY

The advent of the era of smartphones and tablets has opened a chasm between how the Internet is used and how organizations provide Internet connectivity. Wireless networks have transformed from a luxury to a necessity, in order to support devices that don't have legacy wired capability. Furthermore, additional features need to be provided in order to address the rapidly changing usage behavior.

4ipnet's WHG controllers support a variety of mobility features that aim to make enterprise Wi-Fi both easier to use and simpler to manage. For example, by supporting fast roaming, users on mobile devices can be on-the-go without worrying about interrupted connections. It is also not uncommon to see a single user with multiple handheld devices - with the WHG all of the devices can login to Wi-Fi using the same username and password. Finally, mobile-optimized captive portals and ticket-printed QR code automatic login are both easy methods for a user to get online from their mobile device.

| DEVICE MOBILITY                        |       |
|--|-------|
| Fast Roaming Between Access Points     | ♦ Yes |
| Cross Gateway Roaming                  | ♦ Yes |
| WISPr Smart Client                     | ♦ Yes |
| Online User Mobile Device Recognition  | ♦ Yes |
| Mobile Device Optimized Captive Portal | ♦ Yes |
| Multiple Device Logins Per Account     | ♦ Yes |
| QR Code Automatic Login                | ♦ Yes |
| Keypad-based Account Ticket Printer    | ♦ Yes |
| Device Plug-and-Play                   | ♦ Yes |

#### MANAGEMENT

In a wireless LAN, the WHG controller is the central point of management for network administrators, whether it is monitoring current online users or troubleshooting network connectivity issues. The management console of the WHG controller is a browser-based GUI that is simple and intuitive to operate. From this interface, network administrators can configure traffic shaping profiles, track previous network usage, perform system backup and restore, and much more.

From the user management perspective, one of the core benefits of the WHG controller is its ability to enforce different traffic profiles based on both the

location (Service Zone) of the user and the time of access. For example, the profiles applied during work hours can be different from that of during after-work hours. From bandwidth limitations to specific routing rules, network administrators gain fine-grained control over Wi-Fi users.

For access points, WHG controllers support automatic discovery and provisioning, eliminating many repetitive and cumbersome tasks often faced during initial network deployment. Centralized AP configuration and monitoring also greatly reduces maintenance overhead for IT staff.

### SYSTEM MANAGEMENT


|                             |   |
|-----------------------------|---|
| Browser-Based Configuration | <ul style="list-style-type: none"> <li>Administer the system from any standard web browser</li> </ul>                                   |
| Administrator Accounts      | <ul style="list-style-type: none"> <li>Multiple tiered access privileges</li> <li>Monitor each admin's current accessed page</li> </ul> |
| System Time                 | <ul style="list-style-type: none"> <li>Automatic synchronization (NTP)</li> <li>Manually configured</li> </ul>                          |
| System Backup & Restore     | <ul style="list-style-type: none"> <li>Yes</li> </ul>   |
| SNMP                        | <ul style="list-style-type: none"> <li>Yes; v2c</li> </ul>  |
| Network Utilities           | <ul style="list-style-type: none"> <li>Yes; built-in packet capture</li> </ul>  |

### AP MANAGEMENT

|                                   |   |
|-----------------------------------|---|
| Automatic AP Discovery            | <ul style="list-style-type: none"> <li>Yes</li> </ul>                                 |
| Automatic AP Provisioning         | <ul style="list-style-type: none"> <li>Yes; template-based</li> </ul>                 |
| AP Configuration Backup & Restore | <ul style="list-style-type: none"> <li>Yes</li> </ul>                                 |
| AP Firmware Batch Upgrade         | <ul style="list-style-type: none"> <li>Yes</li> </ul>                                 |
| Tunneled AP Management            | <ul style="list-style-type: none"> <li>Yes; both layer 2 &amp; layer 3 APs</li> </ul> |
| AP Load Balancing                 | <ul style="list-style-type: none"> <li>Yes</li> </ul>                                 |

### USER MANAGEMENT

|                                    |   |
|------------------------------------|---|
| User Policy Assignment             | <ul style="list-style-type: none"> <li>Role-based</li> <li>Time &amp; location dependent</li> </ul>                   |
| Bandwidth Limitations              | <ul style="list-style-type: none"> <li>Yes</li> </ul>   |
| Traffic Classification / Remarking | <ul style="list-style-type: none"> <li>Yes; 802.1p / DSCP</li> </ul>  |
| Stateful Firewall                  | <ul style="list-style-type: none"> <li>Yes; each rule with individual enforcement schedules</li> </ul>                |
| Static Route Assignment            | <ul style="list-style-type: none"> <li>Yes</li> </ul>   |
| Concurrent Session Limit           | <ul style="list-style-type: none"> <li>Yes</li> </ul>   |
| IP Address Reassignment            | <ul style="list-style-type: none"> <li>Allow clients to obtain different IP addresses after authentication</li> </ul> |
| Client Change Password Privilege   | <ul style="list-style-type: none"> <li>Allow authenticated users to modify their own login password</li> </ul>        |

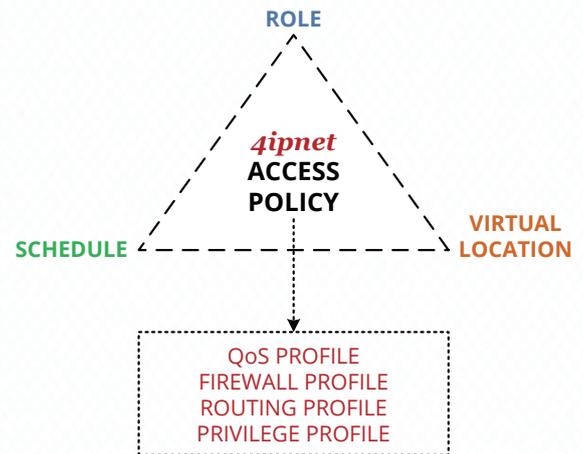

### SERVICES

As wireless networks increasingly become the primary network used by organizations, it is crucial to take into consideration fundamental network services, such as DHCP, NAT, and routing. In addition to providing these functions, the WHG controller also implements the concept of a "Service Zone", which essentially segments the controller into multiple virtual controllers, each with its own associated network services, user policies, authentication settings, etc.

The WHG controller also supports high availability (1+1 redundancy) with automatic synchronization between the active and standby controllers. In conjunction with WAN port failover, businesses can reduce the chance of network downtime, which in most cases directly correlates to lost productivity and revenue.

Finally, the WHG provides unique value-added capabilities, such as a direct integration with Micros Opera PMS that greatly simplifies the overhead of providing managed Wi-Fi in hotels.

### NETWORK SERVICES

|                                |  |
|--------------------------------|--|
| Redundancy (High Availability) | <ul style="list-style-type: none"> <li>1+1 with automatic synchronization</li> </ul>     |
| Internet Protocols Supported   | <ul style="list-style-type: none"> <li>IPv4</li> <li>IPv6</li> </ul>                     |
| DHCP Server                    | <ul style="list-style-type: none"> <li>Yes</li> </ul>                                    |
| DHCP Relay                     | <ul style="list-style-type: none"> <li>Yes</li> </ul>                                    |
| Network Address Translation    | <ul style="list-style-type: none"> <li>Yes</li> </ul>                                    |
| Built-in HTTP Proxy Server     | <ul style="list-style-type: none"> <li>Yes</li> </ul>                                    |
| WAN Port Failover              | <ul style="list-style-type: none"> <li>Yes</li> </ul>                                    |
| WAN Port Load Balancing        | <ul style="list-style-type: none"> <li>Yes</li> </ul>                                    |
| Dynamic Routing Protocols      | <ul style="list-style-type: none"> <li>RIP</li> <li>OSPF</li> <li>IS-IS</li> </ul>       |
| Local DNS Records              | <ul style="list-style-type: none"> <li>Yes</li> </ul>                                    |
| Hotel PMS Integration          | <ul style="list-style-type: none"> <li>Direct interface with Micros Opera PMS</li> </ul> |

|  |                                      |
|--|--------------------------------------|
| Integrated Billing & Accounting System | • Yes                                |
| Billing Quota Types                    | • By duration<br>• By traffic volume |

### REPORTING

Whether it is real-time monitoring of network activity or tracking the usage of previous Wi-Fi users, network administrators need the appropriate tools at their disposal to increase efficiency and reduce workload. The 4ipnet WHG controllers have an extensive set of logging and reporting features that allow network administrators to easily find any information related to the wireless network.

The built-in system dashboard provides a quick overview of the current system status, along with graphical reports of network traffic and system performance. In addition, there is a simple interface for viewing online devices and their associated detailed statistics, including but not limited to the roles they belong to, enforced network policies, and packets transferred.

Alongside network monitoring, the WHG controller also performs detailed logging of all network activity. For example, the User HTTP Web Log allows network administrators to track users who visited malicious websites, while the DHCP Lease Log can assist in troubleshooting clients who cannot receive an IP address. Lastly, the Configuration Change Log shows administrators which settings have been modified in the past, in case there are configuration errors that need to be reverted.

#### SYSTEM & NETWORK STATUS

|   |       |
|---|-------|
| System Dashboard                                  | • Yes |
| Graphical System Performance Reports              | • Yes |
| Traffic Volume Reports                            | • Yes |
| System Process Monitor                            | • Yes |
| Online Device Monitoring                          | • Yes |
| Active Sessions List                              | • Yes |
| Configurable SYSLOG Severity                      | • Yes |
| SMTP (E-mail) Notifications                       | • Yes |
| Multiple Concurrent E-mail Notification Receivers | • Yes |

#### NETWORK ACTIVITY LOGS

|                          |       |
|--------------------------|-------|
| System Log (SYSLOG)      | • Yes |
| CAPWAP Log               | • Yes |
| Configuration Change Log | • Yes |
| RADIUS Server Log        | • Yes |
| SIP Call Log             | • Yes |
| UAMD Log                 | • Yes |
| User Events Log          | • Yes |

|   |       |
|---|-------|
| User HTTP Web Log                       | • Yes |
| WHG Local Web Log                       | • Yes |
| Firewall Log                            | • Yes |
| DHCP Server/Lease Log                   | • Yes |
| PMS Interface Log                       | • Yes |
| On-Demand Billing Report                | • Yes |
| AP Status E-mail Notification           | • Yes |
| Logging to External FTP                 | • Yes |
| Configurable Logs & Reporting Intervals | • Yes |

### SPECIFICATIONS

#### SYSTEM CAPACITY\*1

|                    |                |
|--------------------|----------------|
| Managed APs        | • Up to 500    |
| Local Accounts     | • Up to 15,000 |
| On-Demand Accounts | • Up to 15,000 |

#### HARDWARE SPECIFICATIONS

|                          |   |
|--------------------------|---|
| Form Factor              | • 19" (1U) Rack Mount (Mounting bracket included)   |
| Dimensions (W x D x H)   | • 42.6 cm x 45.0 cm x 4.4 cm  |
| Weight                   | • 8.00 kg (17.64 lbs)   |
| Power                    | • Input: 100-240 VAC, 50/60 Hz (Power cord included)  |
| Interfaces               | • WAN: 2 x 10/100/1000Base-T Ethernet, Auto-MDIX, RJ-45<br>• WAN: 2 x 100/1000 SFP<br>• LAN: 10 x 10/100/1000Base-T Ethernet, Auto-MDIX, RJ-45<br>• LAN: 2 x 100/1000 SFP<br>• Console: 1 x RJ-45 (DB9 to RJ-45 console cable adapter included) |
| LED Indicators           | • Power<br>• HDD  |
| LCD Display              | • Yes   |
| Environmental Conditions | • Operating Temperature: 0°C (32°F) to 50°C (122°F)<br>• Operating Humidity: 5% to 95% non-condensing<br>• Storage Temperature: -20°C (-4°F) to 70°C (158°F)<br>• Storage Humidity: 5% to 95% non-condensing                                    |

\*1: Capacity limits may vary depending on configuration parameters