

Valve Regulated Lead Acid Battery

AGM LONG LIFE BATTERY DB Series

RANGE SUMMARY

By combining the newly developed corrosion resistance alloy and advanced curing process, BSB created the range of long life batteries- Duration range. The range offers 12 years of design life and top terminals. This range battery is highly suitable for UPS system, switch gear, CATV and telecommunication systems.

FEATURES AND BENEFITS

- Long life expectancy of 12 years at floating condition
- Wide temperature range from -15 to 50°C
- Thick flat plate with high Tin low Ca alloy
- Operation with any position without leakage
- Balanced design for both floating and cyclic operation
- Low self-discharge rate and long shelf life
- Excellent deep discharge recovery capability

CONSTRUCTION

- Positive plates - Thick high Sn low Ca grids to resist corrosion and prolong life
- Negative plates - Balanced lead-calcium grids for improve recombination efficiency
- Separators - Advanced AGM separators for ultra low float current
- Electrolyte - Dilute chemical grade sulphuric acid
- Battery container and cover - ABS
- Pillar seal - 100% factory tested, proven two layers epoxy resin seal
- Relief valve - Complete with integrated flame arrestor

CHARGING VOLTAGE AND SETTING

- Constant voltage charging is recommended
- Recommended float charge voltage: 2.27VPC @20-25°C
- Float voltage temperature compensation: -3mV/°C/cell
- Float voltage range: 2.25 to 2.30 VPC@20- 25°C
- Cyclic application charge voltage : 2.40V/cell
- Max charge current allowable : 0.25C_{10A}



DB Series Capacity Range: 40Ah-250Ah

General Specifications



Code No.	Voltage (V)	Capacity (AH)	Length		Width		Height		Total Height		Weight		Terminal Type
			mm	in	mm	in	mm	in	mm	in	Kg	Lb	
DB6-100	6	100	194	7.64	170	6.69	205	8.07	210	8.27	16.5	36.4	T17
DB6-150	6	150	260	10.2	180	7.09	245	9.65	250	9.84	23.5	51.8	T19
DB6-180	6	180	307	12.1	169	6.65	220	8.66	225	8.86	27	59.5	T19
DB6-200	6	200	321	12.6	176	6.93	226	8.90	229	9.02	31	68.4	T19
DB12-40	12	40	197	7.76	165	6.50	170	6.69	170	6.69	13	28.7	T17
DB12-50	12	50	230	9.06	138	5.43	208	8.19	211	8.31	16.5	36.4	T17
DB12-55	12	55	230	9.06	138	5.43	208	8.19	211	8.31	17	37.5	T17
DB12-65	12	65	350	13.8	166	6.54	179	7.05	179	7.05	21.2	46.7	T17
DB12-75	12	75	260	10.2	168	6.61	211	8.31	214	8.43	22.5	49.6	T17
DB12-80	12	80	260	10.2	168	6.61	211	8.31	214	8.43	24	52.9	T17
DB12-90	12	90	306	12.0	169	6.65	211	8.31	214	8.43	27	59.5	T17
DB12-100	12	100	330	13.0	171	6.73	214	8.43	220	8.66	30	66.2	T17
DB12-120	12	120	406	16.0	174	6.85	208	8.19	233	9.17	35	77.2	T19
DB12-135	12	135	342	13.5	172	6.77	280	11.0	285	11.2	42.5	93.7	T19
DB12-150	12	150	485	19.1	172	6.77	240	9.45	240	9.45	44.5	98.1	T19
DB12-180	12	180	494	19.4	206	8.11	209	8.23	235	9.25	54	119	T19
DB12-200	12	200	522	20.6	238	9.37	218	8.58	221	8.70	61	135	T19
DB12-230	12	230	521	20.5	269	10.6	203	7.99	206	8.11	66	146	T19
DB12-250	12	250	521	20.5	269	10.6	220	8.66	223	8.78	72	159	T19

Applications

- UPS
- Electric power distribution system
- CATV and FTTX cabinet
- Telecommunication





Complied Standards

- IEC 60896-21/22
- Telcordia SR-4228
- Eurobat guide, long life
- BS6290 part 4
- UL1989
- IATA and IMDG

All Battery Range

- General Series
- Duration Series
- Deep Cycle Series
- High Rate Series
- Solar Series
- Electric Vehicle Series
- FA Series
- FAG Series
- LSE Series
- LSG Series
- OPzV Series
- OPzS Series

For more battery information, please visit our website: www.bsbpower.com or email to: support@bsbpower.com or enquiries@bsbpower.com

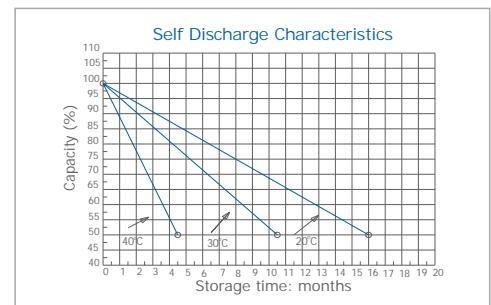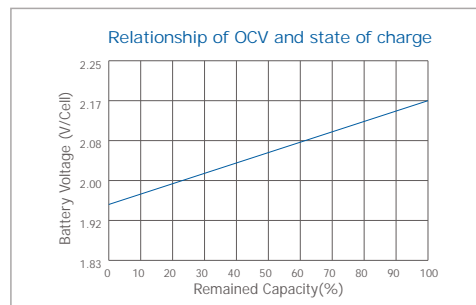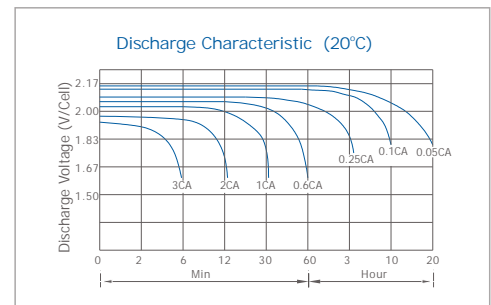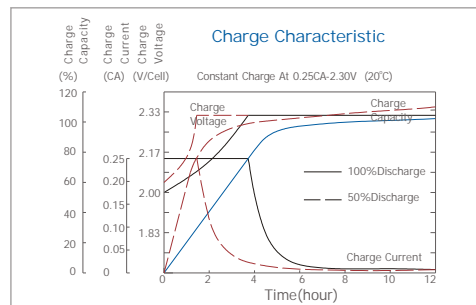

BSB POWER COMPANY LIMITED.

Unit 1823-23A, Level 18 Landmark North,
39 Lung Sum Avenue Sheungshui, New Territories, Hongkong

Tel: +852-26709808

Fax: +852-26701881

Email: enquiry@bsbpower.com

Data showed in charts may varies for each model, contact BSB POWER for specific technical data.

