

2 PORT OPTICAL NODE [ON-x-2-1-x-R-x]

Fiber Products, Optical Nodes


Taikan

Description


Taikan's 2 port Optical Node is an ideal platform for delivering video (digital or analog) as well as high-speed data services over advanced hybrid fiber / coax (HFC) network. This unit combines the superior proven technologies of the RF amplifier with the modular design of the fiber components, allowing Taikan's optical node to provide the full complement of functions required by advanced networks.

Features

- Two High Level Output Ports with GaAs Power Double Amplifier Module
- Rugged Weather Resistant Outdoor Diecast Case
- Switchable Power Supply
- Easy Operation with an LED Display to Show the Optical Level
- -20 dB Level for Output Test

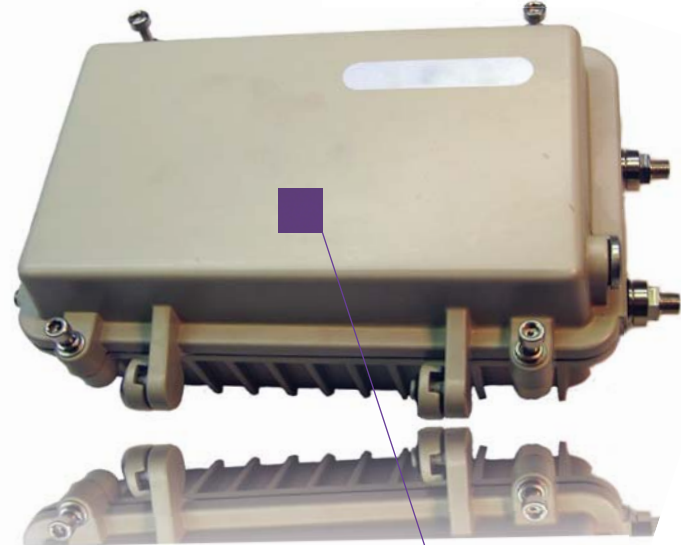

Ordering Information

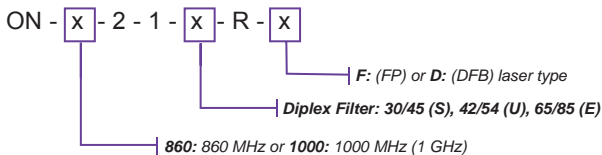

FP Advantage: Economical and ideal for less stringent performance systems.

DFB Advantage: Designed for high capacity reverse traffic and analog video carrier transmission

Model Number	Description	Box Weight	Dimensions (L x W x H)
ON-860-2-1-x-R-x	860 MHz 2 Port Optical Node	2.2 kg / 5 lbs	9.5 x 6.5 x 4.5 in. (12.1 x 16.5 x 11.4 cm)
ON-1000-2-1-x-R-x	1 GHz 2 Port Optical Node	2.2 kg / 5 lbs	9.5 x 6.5 x 4.5 in. (12.1 x 16.5 x 11.4 cm)

Forward Optical Receiver Module

Optical Wavelength	1000 ~ 1600 nm
Input Optical Reflection Loss	> 45 dB
Photoelectric Module Response	0.85 A/W
Max Optical Input Power	3 mW
Optical Input Test Point	1 ± 0.2 V/mW

RF Amplifier Characteristics

Forward Bandwidth (Option)	45-860 (or optional 45-1000) MHz
Frequency Response	0.75 dB
Output Reflection Loss	≥ 15 dB
Output Level	102 dBuV
Distortion: CTB	≥ 65 dB
Distortion: CSO	≥ 62 dB
Test Level	59 Analog Channels +200 MHz Digital -20 dB

Return Optical Transmission (Optional)

Bandwidth	5-100 MHz
Diplex Filter (Option)	30/45, 42/54, 65/85 MHz
Optical Output Power Level	1 mW
Wavelength	1310 nm
Optical Connector	SC / APC

Electrical Characteristics

Voltage	60 V AC: 30 V - 70 V AC or 220 V AC: 150 V - 265 V
---------	--